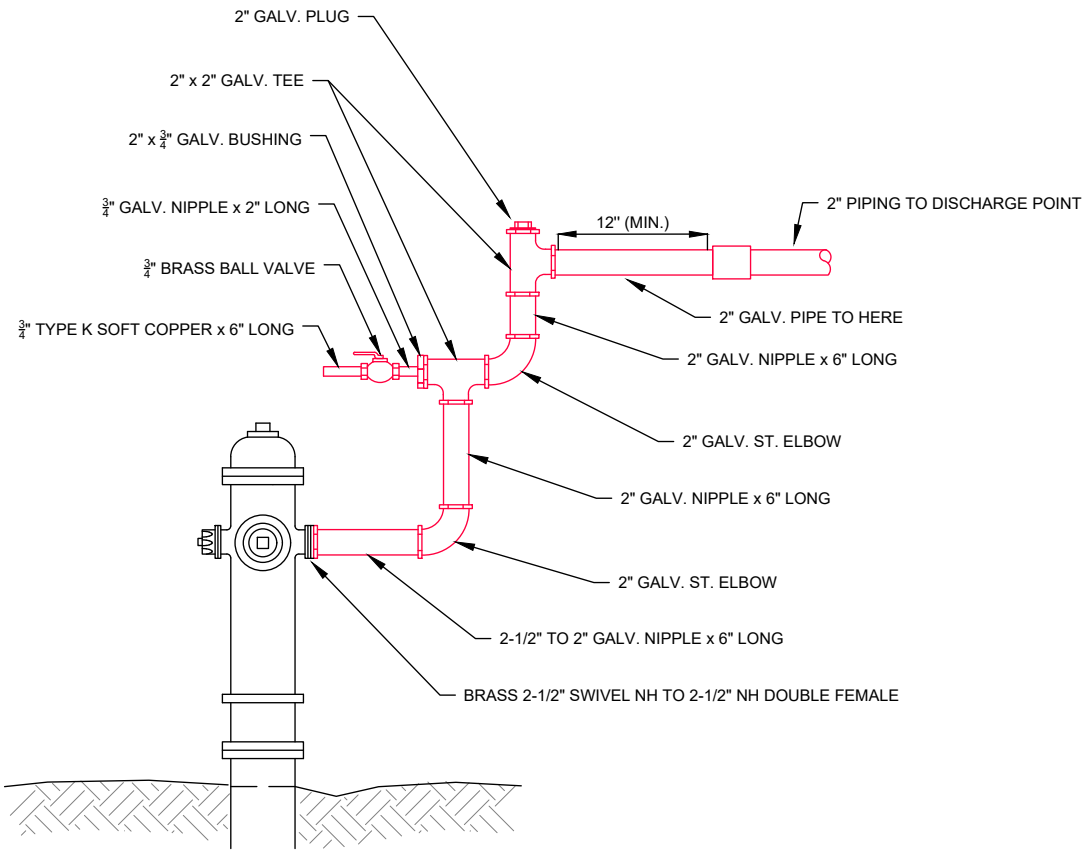

GENERAL NOTES AND INSTALLATION BY CONTRACTOR:

1. FILL SAMPLE PIPING w/ HEAVILY CHLORINATED WATER WHILE MAINS ARE BEING STERILIZED.
   1.1. MIX 2 TABLESPOONS OF H.T.H. PER GALLON WATER INSAMPLE PIPING. CONTACT TIME TO BE 30 MINUTES MINIMUM.
2. WATER MUST BE RUNNING FROM BALL VALVE (SLOWLY) FOR 30 MINUTES MINIMUM BEFORE SAMPLING.
3. OPERATE HYDRANT FROM 6" GATE VALVE, DO NOT OPERATE FROM STEM NUT.

GreenvilleWater

2-INCH BLOWOFF PIPING FOR HYDRANT (FOR SAMPLING)

REVISION DATE:	DETAIL NO:
9.11.2024	12.2
(NOT TO SCALE)	