


PLAN VIEW



1. ALL EXCAVATION TO BE DONE BY PLUMBER PRIOR TO GW ARRIVAL TO SITE.
2. HOLE TO BE WIDER & SHORED WHEN MAIN IS DEEPER THAN 5FT.
3. OSHA APPROVED LADDER TO BE PROVIDED BY CONTRACTOR IN EXCAVATION DEEPER THAN 5FT WITH OSHA APPROVED TRENCH BOX OR SHORING.
4. PLUMBER SHOULD CALL GW ENGINEERING (241-6100) TO REPORT WHEN READY FOR TAP TO BE MADE OR FOR ASSISTANCE IF UNUSUAL CONDITIONS EXIST.

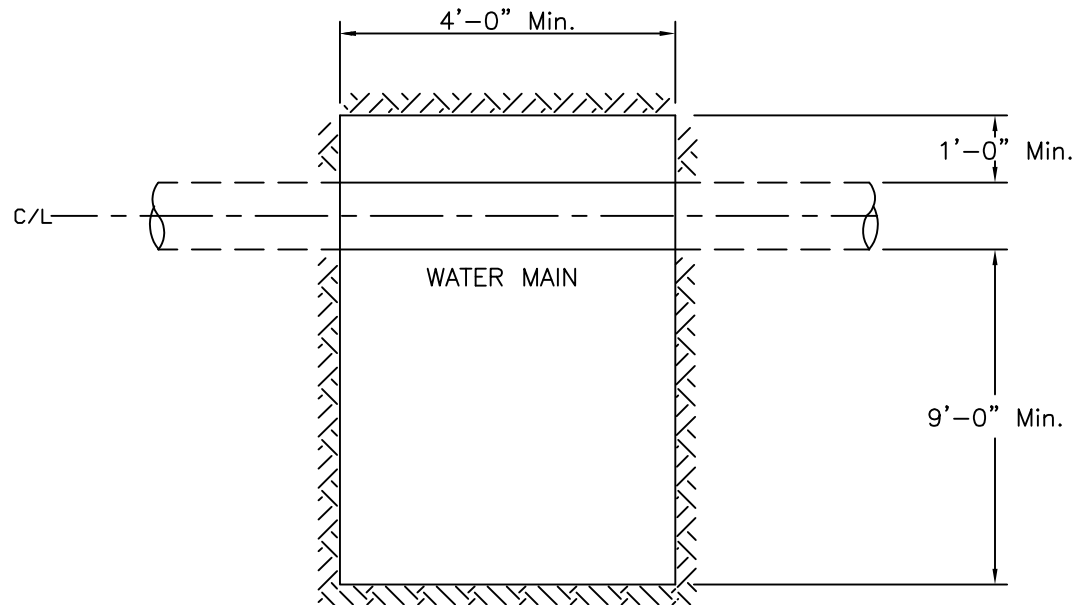

GreenvilleWater

EXCAVATION REQUIRED FOR LARGE TAPS

(1 1/2" TAPS AND LARGER)

REVISED: JUNE 2021